

SCANDIUM™ CATALYTIC VENT-FREE FIREPLACE

DAVE LENNOX
signature
COLLECTION™

Appliance Specifications

Ratings	
Input	6,820 - 11,950 BTU/HR
Fuel	Natural Gas
Venting	Ventless (No Chimney Or Flue Required)
Efficiency	99.99%
Installation	Wall-Mounted (Mounting Template Supplied)
Wall Requirements	Any Wall Surface, Including Combustible Surfaces (Unit Can Not Be Recessed Into Wall)
Manual Control	Manual Rotary - Right Hand Side
Inlet Pressure	Minimum 6 W.C.
Ignition	Piezo
Finish	Black Glass/ Aluminum Effect Trim
Safety Features	O.D.S. - Oxygen Depletion Sensor
Minimum Room Size	600 Cubic Feet *

Fireplace Dimensions

Width - 41-1/2" x Height - 21" x Depth - 7"



* Does not include any additional fuel burning appliances in the space. If you have any additional gas burning appliances in the space, follow combustion and ventilation air section from product installation instructions.

Combustible Clearances

Side Clearance To Combustibles: 4"

Side Clearance To Curtains, Drapes and Other Fabrics: 20"


Minimum Clearance To Ceiling Above Appliance: 32" (measured from top of glass panel)

Clearance To Combustibles Placed Directly In Front Of Unit: 40"

Due to heat output, electronic appliances such as televisions, should not be mounted on the wall above the unit

Product Reference Information			
Cat. No.	Model	Ship. Wt.	Ship. Volume
H6065	Scandium-NG	80.7 lb.	12.9 cu. ft.

A FULL SIZE TEMPLATE IS SUPPLIED TO ASSIST WITH WALL MOUNTING

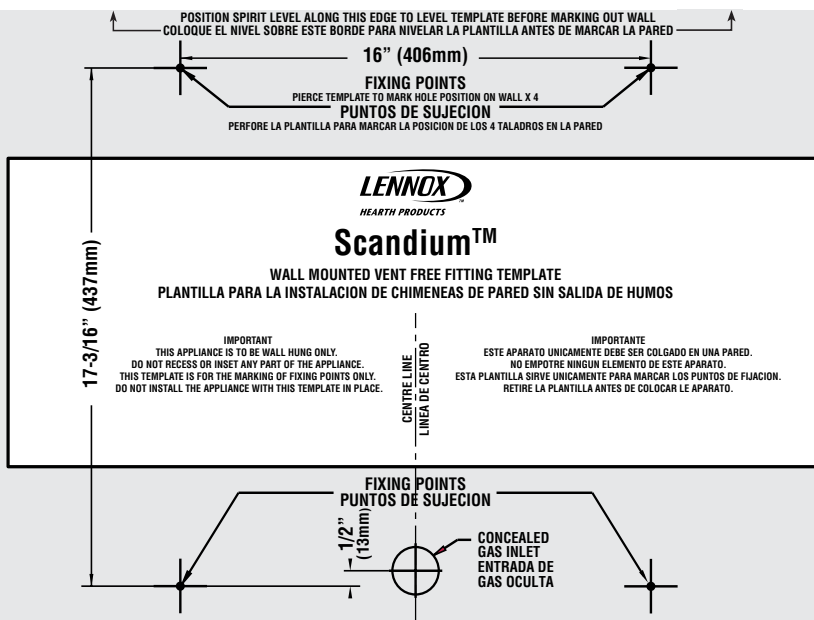

Listing Information

This Lennox Hearth Products unvented gas room heater is certified by OMNI-Test Laboratories, Inc to ANSI Z21.11.2 standard.

Tested & Listed By  Beaverton Oregon USA

OMNI-Test Laboratories, Inc.

OTL Report No. 317-S-05-5

NOTE: Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change without notice.